


# A17-3/8"

## Bottom inlet fill valve

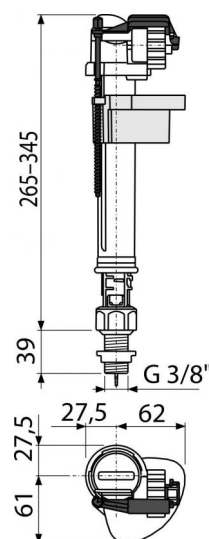

### Application

To install into the bottom of the cistern  
For ceramic flushing cistern  
For replacement

### Features

- The design allows optimum height adjustment of the valve according to the height of the cistern
- Low sensitivity to the changing pressure in the water main
- Material: ABS
- Adjustable water level
- Plastic thread length 39 mm
- Smooth closing without any shocks
- Built-in filter to trap dirt

### Scope of supply

- Nut 3/8" – white
- Strainer for dirt
- Valve

### Order number, Logistic information

Code	EAN	Weight (kus   packing   palett)	Dimensions (piece   packing)	Quantity (packing   palett)
A17-3/8"	8594045931617	0,2269   11,3450   201,5200 kg	310×90×89   590×430×390 mm	50   800 pcs

Guarantee	Customs code	Norms
2/3 years	84818019	EN 14124

### Technical specifications

- Acoustic group II <30 dB
- Recommended operating pressure 0,5-0,8 MPa
- Working range 0,05-0,8 MPa
- Height adjustment range 265-345 mm
- Thread diameter 3/8"